


# RG-RAP1261 Reyee Wi-Fi 6 AX3000 Ultra-Thin Wall Plate Access Point

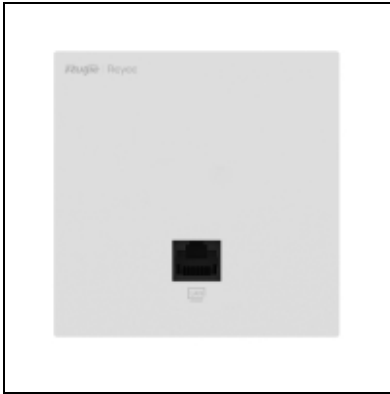

**Kode** : RG-RAP1261  
**Kategori** : Ruijie & Reyee Wireless  
**Harga** : Rp 1.084.000,00

RG-RAP1261 Reyee Wi-Fi 6 AX3000 Ultra-Thin Wall Plate Access Point.


**\*Belum termasuk adaptor dan poe injector.**

**Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.**

Penawaran Harga Spesial

 **08112039555**

- Wi-Fi 6, 2976Mbps, 2\* GE, 86mm Ultra-Thin Design.
- Dual-radio performance, gigabit wireless wall-mounted AP.
- Better experience with Cooling Patent Technology.
- Easy installation, 86mm standard compatible.
- Capable of Reyee Mesh and 802.11K/V.
- Powerful Standalone Portal via Ruijie Cloud.

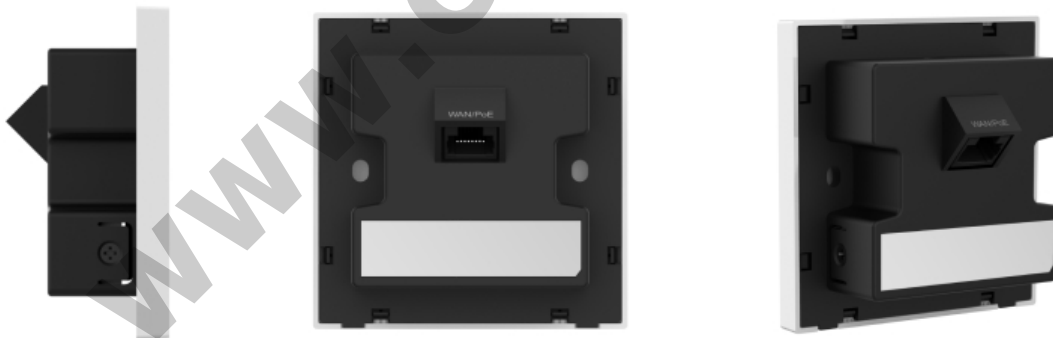

## Specification

<b>Model</b>	RG-RAP1261
<b>Wi-Fi Standards</b>	802.11a/n/ac/ax 802.11b/g/n/ax
<b>MIMO</b>	2.4 GHz, 2x2, MU-MIMO 5 GHz, 2x2, MU-MIMO
<b>Max. Data Rate</b>	2.4 GHz: 574 Mbps 5 GHz: 2402 Mbps
<b>Number of Antennas</b>	5

<b>Antenna Type</b>	Built-in omnidirectional antennas
<b>Antenna Gain</b>	2.4 GHz: 1.6 dBi 5 GHz: 4.13 dBi Note The peak gain mentioned above refers to the gain of a single antenna
<b>Transmit Power</b>	2.4 GHz: 20 dBm 5 GHz: 30 dBm Note The transmitted power may vary based on local laws and regulations.
<b>Fixed Ports</b>	1 x 10/100/1000Base-T Ethernet uplink port 1 x 10/100/1000Base-T Ethernet downlink ports 1 x Reset hole
<b>Max. Number of Concurrent STAs</b>	512
<b>Recommended Number of Concurrent STAs</b>	110
<b>Max. Number of SSIDs</b>	8
<b>Supported Frequency Bands</b>	802.11b/g/n/ax: 2.400 GHz to 2.483 GHz 802.11a/n/ac/ax: 5.150 GHz to 5.350 GHz, 5.470 GHz to 5.725 GHz, 5.725 GHz to 5.850 GHz Note: Country-specific restrictions apply
<b>Channel Bandwidth</b>	2.4 GHz: Auto/20 MHz/40 MHz 5 GHz: Auto/20 MHz/40 MHz/80 MHz/160 MHz
<b>Roaming</b>	Layer 2 roaming Layer 3 roaming 802.11k/v roaming
<b>Security Mode</b>	WAP-PSK, WAP2-PSK, and WPA-WAP2-PSK
<b>Network Access Mode</b>	PPPoE Client DHCP Client Static IP
<b>VLAN</b>	Port-based VLAN VLAN over 802.1Q TV projection screen
<b>LED</b>	1 x System status LED
<b>Reset Hole</b>	1 x Reset hole
<b>Dimensions (W x D x H)</b>	86 mm x 86 mm x 42.4 mm (3.39 in. x 3.39 in. x 1.67 in.)
<b>Installation Method</b>	In-wall mounting
<b>Power Supply</b>	IEEE 802.3af/at PoE
<b>Max. Power Consumption</b>	10.2 W
<b>Operating Temperature</b>	0°C to 40°C (32°F to 104°F )
<b>Storage Temperature</b>	-40°C to +70°C (-40°F to +158°F)
<b>Operating Humidity</b>	5% to 95% RH (non-condensing)
<b>Storage Humidity</b>	5% to 95% RH (non-condensing)
<b>Ingress Protection Rating (IP Rating)</b>	IP41
<b>Surge Protection</b>	+/-4kV
<b>MTBF</b>	400,000 hours

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

**URL :** <https://www.citraweb.com/produk/1065/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**

[www.citraweb.com](http://www.citraweb.com)