

On Line UPS PlusPRO 2 1000VA/900Watt + Battery

Kode : PLUSPRO2-1000G(B)

Brand : Aplus

Jenis : Discontinued

Harga : Rp 4.710.000,00

Rp 6.170.000,00



PlusPro 2-1000G adalah produk dari APlus UPS System dengan rating 1000VA/900Watt yang memiliki desain ganda (tower / rackmount) dan juga "Easy Battery Replacement". Dilengkapi dengan external PDU dan sekaligus MBS (Maintenance Bypass Switch) sehingga memungkinkan pengguna untuk mudah melakukan maintenance atau mengganti battery jika sudah lemah.

***Penjualan produk ini sudah termasuk 3pcs battery 12V/9AH**

***Garansi 1 Tahun**

***Garansi battery 1 bulan**

Penawaran Harga Spesial

 08112039555


Features :

- High performance true double-conversion On Line UPS 1000VA
- Individual power distribution unit (PDU) maintenance bypass switch
- Intelligent Slot (SNMP card not included) + USB multiple communications
- External battery bank to extend back-up time (Optional)
- Microprocessor control guarantees high reliability
- Low heat dissipation in long time operation
- Emergency power-off function (EPO)
- Automatic self-testing function
- High efficiency mode (ECO mode)
- Output voltage regulation < 2%
- Power management software
- Output power factor 0.9
- Wide input range
- Fan speed control
- DC start

Battery Type :

- VRLA 12V/9AH or VRLA 12V/7.2AH
- 3 pcs
- **Battery dimension 151 x 65 x 100 mm**

Easy Maintenance and Installation :

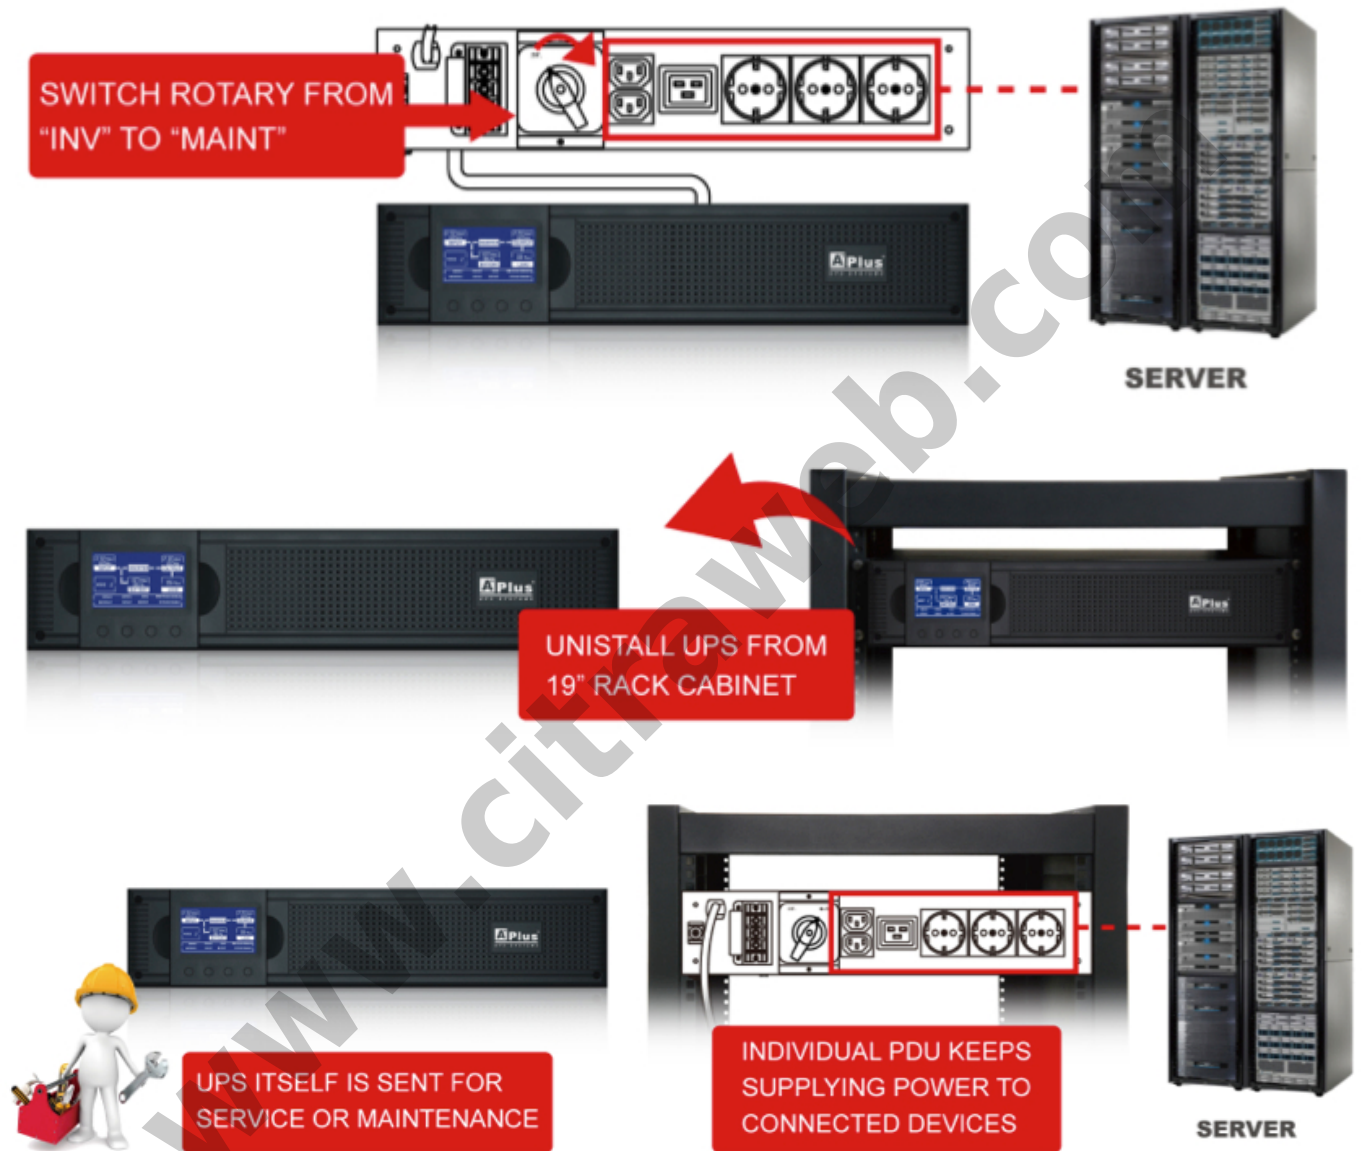

Manual :

[UPS-Aplus-PRO2.pdf](#)

Battery Installation Guide :

[Aplus_Plus_battery_Installation.pdf](#)

Add-on Accessories :

[Universal Rackmount L Rail](#)

Specification :

| INPUT | |
|------------------------------|--|
| Voltage | 1 Phase 2 Wires with Ground 220/230/240Vac |
| Voltage Range | 110-300Vac |
| Frequency | 50Hz or 60Hz (Auto-Sensing) |
| THDi | < 5% at full Load |
| OUTPUT | |
| Voltage | 220/230/240Vac |
| Voltage Range | +/- 2% |
| Frequency (Battery Mode) | 50Hz or 60Hz +/- 0.2Hz |
| Waveform | Pure Sinewave |
| THD | < 3%(linear load), < 5%(non-linear load) |
| Crest Ratio | 3:1 |
| EFFICIENCY | |
| To AC Mode | > 88% |
| To Battery Mode | > 85% |
| To ECO Mode | > 93% |
| BATTERY | |
| Voltage | 36VDC |
| Type | 12V/9AH*3pcs |
| Recharge Time | 5 hours to 90% |
| TRANSFER TIME | |
| Line Mode to Battery Mode | 0ms |
| Inverter to Bypass, ECO Mode | < 4ms |

| | |
|-----------------------|---|
| ECO Mode to Inverter | < 10ms |
| DISPLAY | |
| LCD Display | Input, Output, Load, Battery, Mode/Fault/Warning code, Inverter operating, Bypass operating, Output voltage and frequency and Bypass disable / enable selection information |
| AUDIBLE ALARM | |
| Battery Mode | Beeps Every 4 Seconds |
| Low Battery | Sounding Every Second |
| Overload | Sounding Twice Every Second |
| Fault | Beeping continuously |
| COMMUNICATIONS | |
| Interface (Port) | USB Port |
| Intelligent Slot | Yes, but SNMP card is optional |
| EPO | Emergency Power Off |
| ENVIRONMENT | |
| Operating Temperature | 0° C - 45° C |
| Humidity | 20-90% (Non-condensing) |
| Acoustic Noise | <50db at 1M |
| PHYSICAL | |
| Rack Height | 2U |
| Dimension (W*D*H) | 480*440*90mm |

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1124/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com