

Cambium Networks ePMP Force 425



Kode : ePMP-Force-425

Brand : Cambium

Jenis : Wireless Outdoor

Harga : Rp 7.850.000,00

Rp 9.100.000,00

Cambium Networks memperkenalkan solusi point to point ePMP Force 425 yang memberikan throughput hingga 1 Gbps. Menggunakan standar wireless **802.11ax** terbaru. Memiliki **1 x RJ-45**, **1 x SFP**, dan **antena dish sudah termasuk**.

***Spesifikasi perangkat dijual bisa berbeda dengan yang ditampilkan karena menyesuaikan dengan regulasi di Indonesia.**

Penawaran Harga Spesial

 08112039555

ePMP Force 400 Series Quick Look (Key Product)





- Solusi point-to-point pertama di industri berdasarkan 802.11ax, memberikan kapasitas hingga Gbps.
- Kualitas enterprise berkapasitas tinggi.
- Solusi Backhaul WISP berbiaya ekonomis.
- Wi-Fi Hotspot Backhaul.
- GPON last mile.

| Spectrum | |
|----------------------------------|--|
| Channel Width MHz | 20 40 80 |
| Proprietary Physical Layer | 802.11ax, 2x2 MIMO/OFDM |
| Channel Spacing | Configurable in 5 MHz increments |
| Frequency Range | Country-dependent based on local regulations. |
| MAC Layer (Media Access Control) | Cambium Proprietary |
| Ethernet Interface | 100/1000 BaseT, Compatible with Cambium PoE & Standard PoE pinouts; 10 Gigabit SFP cage for optional SFP modules Protocols |
| Used | IPv4/IPv6 (Dual Management Stack), UDP, TCP, ICMP, SNMPv2c, NTP, STP, IGMP, SSH |
| Network Management | IPv4/IPv6, HTTPs, SNMPv2c, SSH, Cambium Networks CnMaestro™ |
| VLAN | 802.1Q with 802.1p priority |

| Performance | |
|---|---|
| ARQ | Yes |
| Maximum Capacity | 1 Gbps |
| Latency | < 5 ms |
| Nominal Receive Sensitivity (w/FEC) @20 MHz Channel | MCS 0 = -93 dBm to MCS 11 (1024 QAM-5/6) = -63 dBm (per chain) |
| Nominal Receive Sensitivity (w/FEC) @40 MHz Channel | MCS 0 = -90 dBm to MCS 11 (1024 QAM-5/6) = -60 dBm (per chain) |
| Nominal Receive Sensitivity (w/FEC) @80 MHz Channel | MCS 0 = -87 dBm to MCS 11 (1024 QAM-5/6) = -57 dBm (per chain) |
| Modulation Levels (Adaptive) | MCS 0 (BPSK) to MCS 11 (1024 QAM-5/6) |
| Transmit Power Range | +3 to +28 dBm (combined, to regional EIRP limit) (1 dB interval) |
| Maximum Distance | In PTP application deployments, the maximum distance supported is 32 km (19.9 mi) |
| Physical | |
| Connectors | 1 x RJ-45, 1 x SFP |
| Surge Supression* | 1 Joule Integrated |
| Environmental | IP67 including metal housing |
| Temperature | -30°C to 55°C (-22°F to 131°F) |
| Weight | 4.8 kg (10.6 lbs.) |
| Wind Survival | 180 km/h (112 mph) |
| Dimensions(H x W x D) | 470 mm diameter x 285 mm depth (18.5 in diameter x 11.2 in depth) |
| Pole Diameter Range | Center: 3.1 to 7.6 cm (1.25 to 3.0 inches) |
| Power Consumption | 28 W |
| Input Voltage | 802.3at or Passive PoE 44-59 V |
| Included Power Supply | 100-230VAC ,56V, 30W, PoE adaptor *Optional 56V surge suppressor available: Part # C000000L033A **Longer bolts are needed for pole diameter greater than 55 mm |
| Security | |
| Encryption | 128-bit Over-the-Air Encryption (256-bit AES where export rules allow - ROADMAP Feature) |

| Certifications | |
|---------------------------------|---|
| FCC Regulatory Part Number | C058940P102A |
| FCC ID* | Z8H89FT0062 |
| ETSI/ROW Regulatory Part Number | C050940P001A |
| Industry Canada Cert* | 109W-0062 |
| CE | EN 301 893 V2.1.1 (5.4 GHz), EN 302 502 V2.1.1 (5.8 GHz)* |
| Antenna Specifications | |
| Frequency Range | 4910-6135 MHz |
| Antenna Type | Dish |
| Peak Gain | 25 dBi |
| 3 dB Beamwidth Azimuth | 7° |
| 3 dB Beamwidth Elevation | 7° |
| Front-To-Back Isolation | >32 dB |
| Cross Polarization | >11 dB |

Force 425 Antenna Patterns

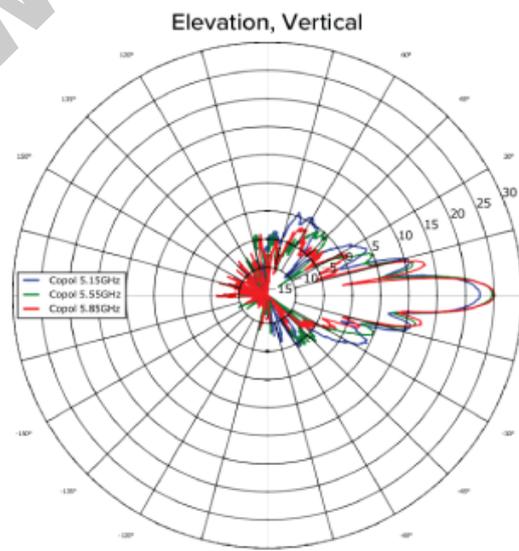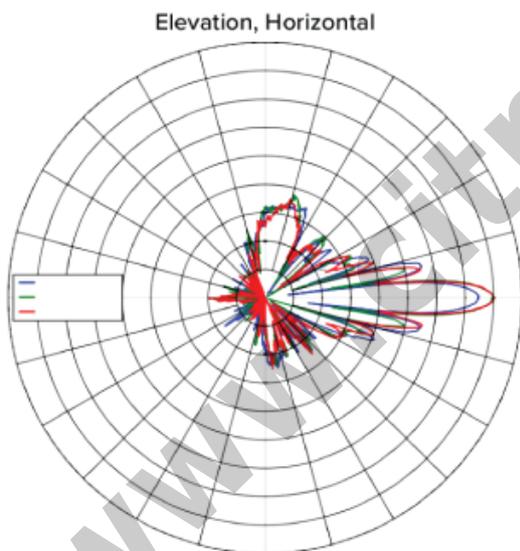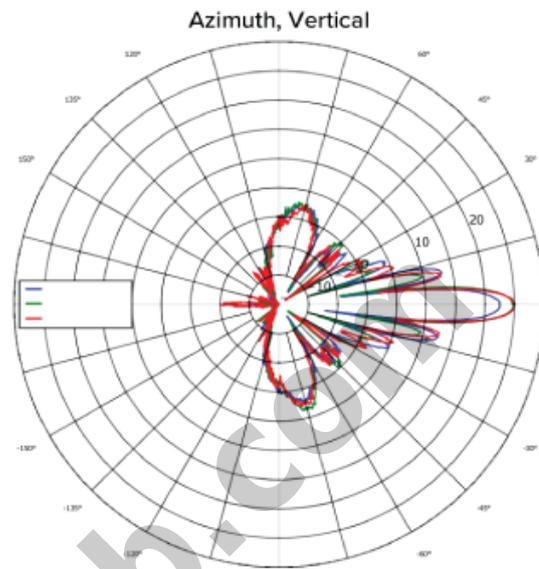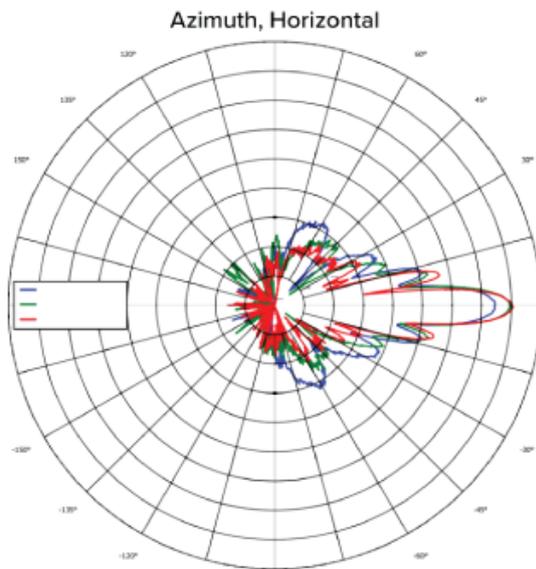

Download Data Sheet : [Data Sheet ePMP Force 400 Series](#)

Rencanakan dan
kelola penerapan
ePMP Force 425 Anda
dengan **LINKPlanner**
dan **cnMaestro™**



* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1144/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com

www.citraweb.com