

FD512XW-R460 C-DATA 1GE 1FE WIFI XPON ONU



Kode : FD512XW-R460

Brand : C-Data

Jenis : FTTH ONT/ONU/MDU

Harga : Rp 280.000,00

Rp-305.000,00


FD512XW-X-R460 C-DATA dual-mode ONU supports EPON and GPON two modes access. The ONU automatically switches into the corresponding PON mode by identifying the local OLT mode to complete GPON or EPON adaptive access.

***Spesifikasi perangkat dijual bisa berbeda dengan yang ditampilkan karena menyesuaikan dengan regulasi di Indonesia.**

Penawaran Harga Spesial

 08112039555

- In compliant with IEEE802.3ah and ITU - T G.984 standard
- Support ONU auto-discovery/Link detection/remote upgrade of software
- Meet 802.11 b/g/n technical standards
- Support multicast function
- Support DHCP/Static/PPPOE internet mode
- Support port-binding
- Support OAM/OMCI remote management
- Support data encryption and decryption function
- Support Dynamic Bandwidth Allocation (DBA)
- Support MAC filter and URL access control
- Support power-off alarm function, easy for linkproblem detection
- Specialized design for system breakdown prevention to maintain stable system
- EMS network management based on SNMP ,convenient for maintenance

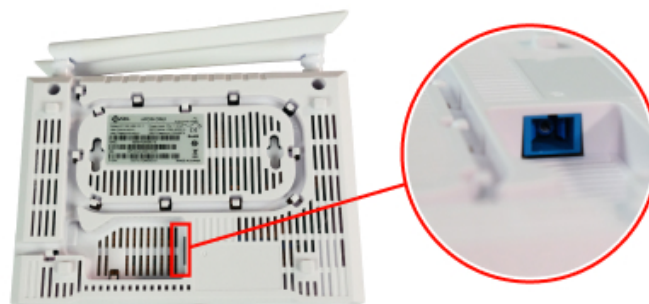

Specification

| | |
|------------------------------|---|
| Model | FD512XW-X-R460 |
| GPON/EPON Port | Single mode single fiber GPON : FSAN G.984.2 standard, Class B+ EPON : 1000BASE-PX20+ symmetric |
| Downstream/Upstream | GPON : 2.488Gbps/1.244Gbps EPON : 1.25Gbps |
| Wavelength | Transmit : 1310nm Receiver : 1490nm |
| Port rate | EPON: Symmetrical 1.25Gbps |
| Wavelength | Forwarding : 1490nm Receiving : 1310nm |
| Receiving sensitivity | GPON : -28dBm EPON : -27dBm |
| Saturated power | GPON : -8dBm EPON : -3dBm |
| Transmitting power | GPON : 0.5 ~ 5dBm EPON : 0 ~ 4dBm |
| Receiving sensitivity | PX20+ : -28dBm |
| Saturation power | PX20+ : -8dBm |
| Backplane Bandwidth | 98G |
| User Port (LAN) | 1*10/100 and 1 *10/100/1000Mbps adaptive Ethernet port Full/half duplex Auto MDI/MDI-X |
| WIFI | IEEE802.11b/g/n (2.4G) Max rate: 300M (2.4G) Max TX power: 2.4G : 17dBm |
| Power | External 12VDC/0.5A power supply adapter |
| Power consumption | <4W |
| Operating temperature | 0 to 40°C |
| Storage temperature | -40 to 85°C |
| Operating humidity | 10% to 90%(Non-condensing) |

[Download Datasheet](#)

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1233/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com

www.citraweb.com