

FD512XW-R460 C-DATA 1GE 1FE WIFI XPON ONU



Kode : FD512XW-R460

Brand : C-Data

Jenis : FTTH ONT/ONU/MDU

Harga : Rp 270.000,00

Rp-305.000,00


FD512XW-X-R460 C-DATA dual-mode ONU supports EPON and GPON two modes access. The ONU automatically switches into the corresponding PON mode by identifying the local OLT mode to complete GPON or EPON adaptive access.

***Spesifikasi perangkat dijual bisa berbeda dengan yang ditampilkan karena menyesuaikan dengan regulasi di Indonesia.**

Penawaran Harga Spesial

 08112039555

- In compliant with IEEE802.3ah and ITU - T G.984 standard
- Support ONU auto-discovery/Link detection/remote upgrade of software
- Meet 802.11 b/g/n technical standards
- Support multicast function
- Support DHCP/Static/PPPOE internet mode
- Support port-binding
- Support OAM/OMCI remote management
- Support data encryption and decryption function
- Support Dynamic Bandwidth Allocation (DBA)
- Support MAC filter and URL access control
- Support power-off alarm function, easy for linkproblem detection
- Specialized design for system breakdown prevention to maintain stable system
- EMS network management based on SNMP ,convenient for maintenance

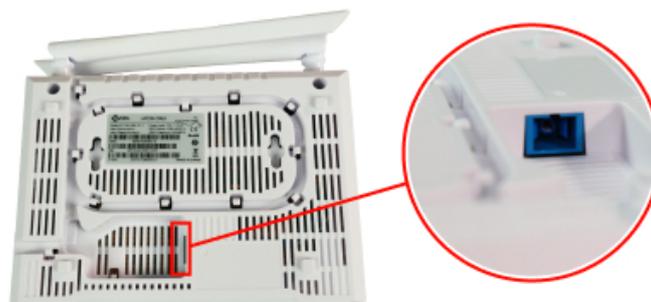

Specification

Model	FD512XW-X-R460
GPON/EPON Port	Single mode single fiber GPON : FSAN G.984.2 standard, Class B+ EPON : 1000BASE-PX20+ symmetric
Downstream/Upstream	GPON : 2.488Gbps/1.244Gbps EPON : 1.25Gbps
Wavelength	Transmit : 1310nm Receiver : 1490nm
Port rate	EPON: Symmetrical 1.25Gbps
Wavelength	Forwarding : 1490nm Receiving : 1310nm
Receiving sensitivity	GPON : -28dBm EPON : -27dBm
Saturated power	GPON : -8dBm EPON : -3dBm
Transmitting power	GPON : 0.5 ~ 5dBm EPON : 0 ~ 4dBm
Receiving sensitivity	PX20+ : -28dBm
Saturation power	PX20+ : -8dBm
Backplane Bandwidth	98G
User Port (LAN)	1*10/100 and 1 *10/100/1000Mbps adaptive Ethernet port Full/half duplex Auto MDI/MDI-X
WIFI	IEEE802.11b/g/n (2.4G) Max rate: 300M (2.4G) Max TX power: 2.4G : 17dBm
Power	External 12VDC/0.5A power supply adapter
Power consumption	<4W
Operating temperature	0 to 40°C
Storage temperature	-40 to 85°C
Operating humidity	10% to 90%(Non-condensing)

[Download Datasheet](#)

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1233/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com

www.citraweb.com