

Flex 2.5G PoE UNIFI UBIQUITI 8-port 2.5 GbE PoE++ with 10 GbE RJ45/SFP+ Combination Uplink Port

Kode : USW-Flex-2.5G-8-Poe

Brand : Ubiquiti

Jenis : Switch Managed POE

Harga : Rp 3.710.000,00




USW-Flex-2.5G-8-Poe Flexible, 8-port 2.5 GbE PoE++ switch with a 10 GbE RJ45/SFP+ combination uplink port that can be powered with PoE+++ or an AC power adapter..

Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.

Penawaran Harga Spesial

 **08112039555**

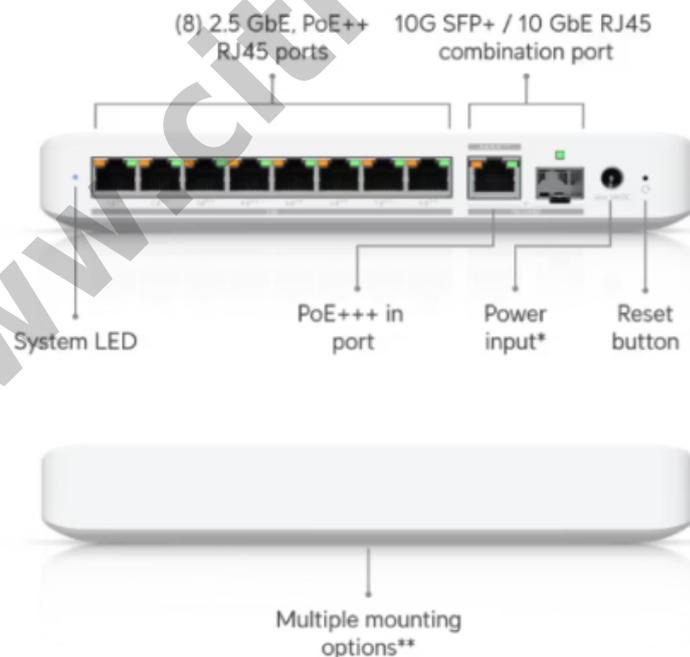

*AC power adapter sold separately.

**Wall-mountable (kit included), DIN rail-mountable (sold separately).

Specification

Model	USW-Flex-2.5G-8-Poe
Ports	2.5 GbE RJ45 : 8 (All PoE++) (2.5G/1G/100M/10M) Combo Port : 10 GbE RJ45 : 1 (PoE++) (10G/5G/2.5G/1G/100M) 10G SFP+ : 1 (10G/1G)
Total PoE Availability	PoE+++ input: 76W PoE++ input: 46W PoE+ input: 16W 210W AC adapter input: 196W
Max. PoE Wattage per Port by PSE	PoE : 15.4W PoE+ : 32W PoE++ : 64W
Form Factor	Compact Desktop, wall, DIN, magnetic
Layer Type	Layer 2
Switching capacity	60 Gbps
Total Non-Blocking Throughput	30 Gbps
Forwarding rate	45 Mpps
Supported VLANs	256
MAC address table	4000
Dimensions (W x D x H)	212.9 x 99.4 x 33.5 mm (8.4 x 3.9 x 1.3")
Max. Power Consumption	14W (Excluding PoE output) with PoE input 17W (Excluding PoE output) with AC adapter input 210W (Including PoE Output)
Power Method	(1) AC/DC adapter (Excluded) (1) PoE+++
Power Input Method	DC Input PoE
Supported Voltage Range	50—57V DC/PoE
Management	Ethernet
Enclosure Material	Polycarbonate
Ambient Operating Temperature	-20 to 45° C (-4 to 113° F)
ESD/EMP Protection	Air: ± 16kV, contact: ± 12kV
Ambient Operating Humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC

** Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

URL : <https://www.citraweb.com/produk/1429/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com

www.citraweb.com