

FD1601S-C2 C-DATA 1PON PORT GPON OLT

Kode : FD1601S-C2

Brand : C-Data

Jenis : FTTH OLT

Harga : Rp 2.500.000,00


Rp 3.300.000,00



C-DATA FD1601S-C2 adalah perangkat GPON OLT dengan 1 port GPON (split 1:128) dan 2 port Gigabit Ethernet dan 1 port SFP+ 10G uplink, yang menawarkan performa tinggi, hemat daya, serta fleksibilitas tinggi untuk berbagai aplikasi seperti FTTP (Fiber to the Premise), jaringan LAN perusahaan, IoT, dan jaringan monitoring video dengan rasio harga-kinerja yang sangat baik.

Penawaran Harga Spesial

[08112039555](tel:08112039555)

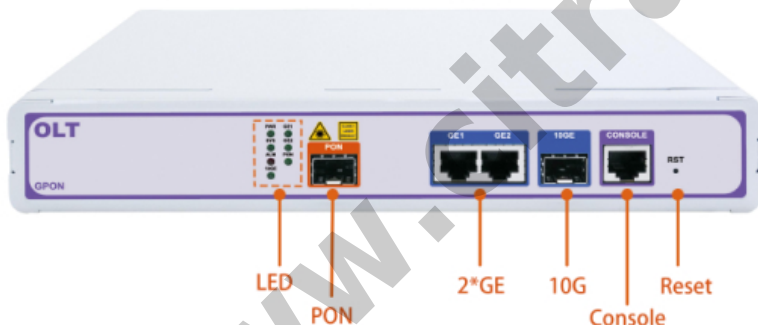

 CMS Management
  1:128
  Mini Size
  Without Fans (Noiseless)
  Dedicated Chip
  Single Port

Spesifikasi

Model	FD1601S-C2
Uplink Port	2* 10/100/1000M auto-negotiation Ethernet ports
	1* 10 Gigabit uplink SFP+ port

PON Port	Quantity : 1
	Physical interface : SFP slot
	Interface type : GPON: ITU-T G.984.2 Class B+/Class C+/Class C++
	Max splitting ratio : GPON: 1:128
Management Port	1* CONSOLE local management port
Transmission distance	20KM
Port rate	GPON: Downstream: 2.5Gbps Upstream: 1.25Gbps
Wavelength	Forwarding: 1490nm Receiving: 1310nm
Interface type	SC/UPC
Fiber type	9/125µm SMF (Single Mode Fiber)
Light transmission power	Class B+: +1.5 ~+5dBm Class C+: +3 ~ +7dBm ClassC++: +4.5dBm~+10dBm
Receiving sensitivity	Class B+: -28dBm Class C+: -30dBm ClassC++: -31dBm
Saturation power	Class B+: -8dBm Class C+: -12dBm ClassC++: -10dBm
Backplane Bandwidth	27.75G
Power supply	AC : 100V ~ 240V, 47~63Hz DC : 1. External adapter mode 12V/3A with BBU 2. External adapter mode 12V/1.5A without BBU
Working temperature	-15 ~ 50 C
Storage temperature	-40 ~ 85 C
Ambient humidity	5 ~ 90% (Non-condensing)

[Download Datasheet](#)

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1556/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com