

# TP-LINK ES210GP OMADA 10-Port Gigabit Easy Managed Switch with 8-Port PoE+

**Kode** : ES210GP

**Brand** : TP-Link Omada

**Jenis** : Switch Managed POE

**Harga** : Rp 1.224.000,00




**TP-LINK ES210GP OMADA** merupakan switch layer 2 dengan casing desktop/wallmount, 8 port Gigabit 802.3af/at PoE+ dengan max PoE budget 63 W (up to 30 W per port), 1 port Gigabit RJ45 dan 1 port Gigabit Combo RJ45/SFP.

**Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.**

Penawaran Harga Spesial

 **08112039555**

- 9 port RJ45 10/100/1000Mbps (8 port PoE+ yang sesuai dengan standar 802.3af/at)
- 1 port kombo Gigabit SFP/RJ45
- Konsumsi daya 63W, dengan daya hingga 30W untuk setiap port PoE
- Mudah Digunakan: Mendukung plug-and-play untuk konektivitas instan dan konfigurasi sederhana untuk fitur tambahan.
- Manajemen Cloud Terpusat melalui web atau aplikasi Omada
- Pencegahan Loop Otomatis, VLAN, dan IGMP Snooping
- Desain tanpa kipas untuk pengoperasian yang senyap
- Casing logam yang tahan lama dan desain pemasangan di meja/dinding.

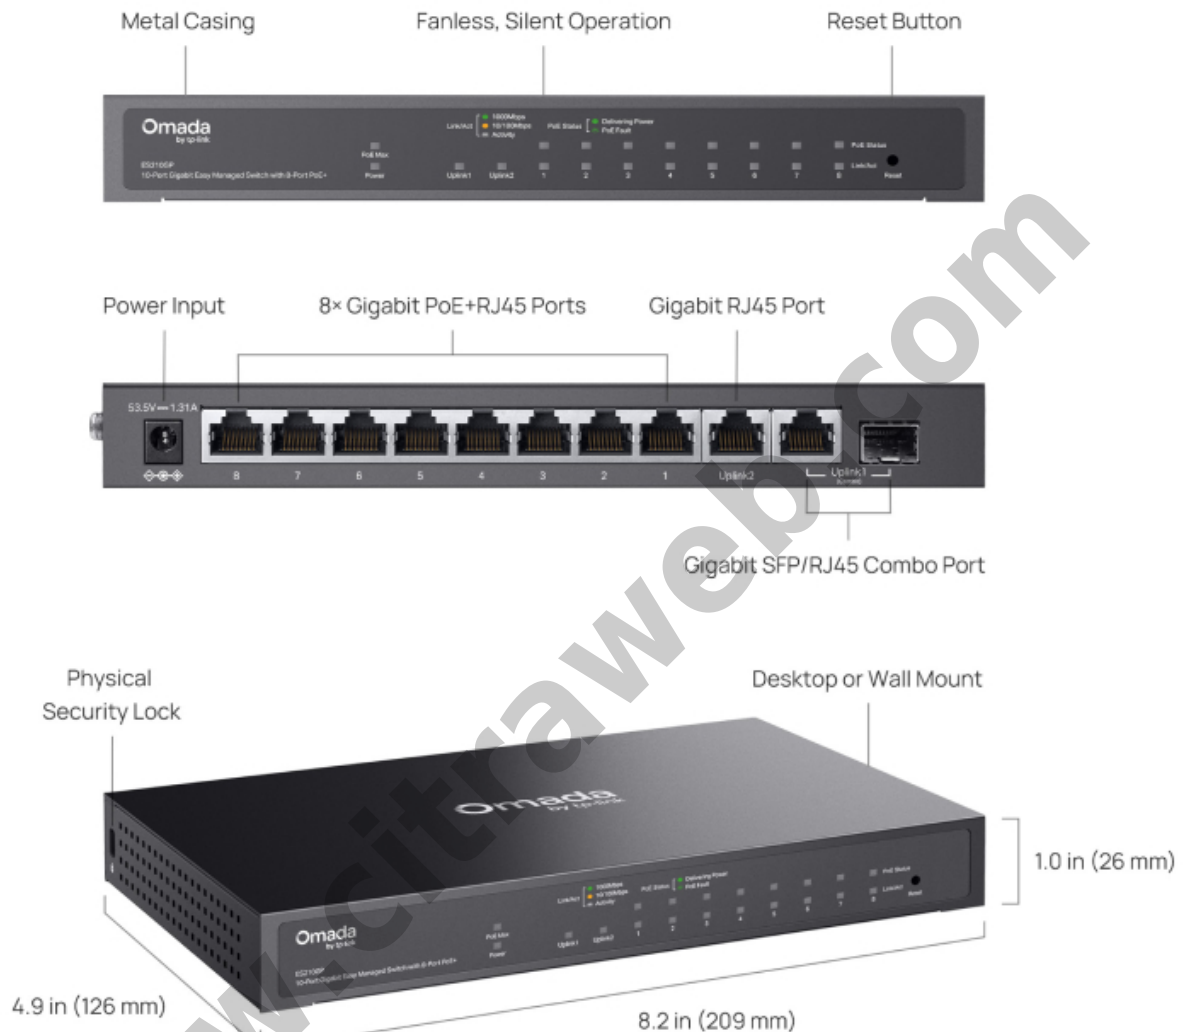

## Spesifikasi

|                          |                                                                                                                                                                                                                                                  |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Model</b>             | ES210GP                                                                                                                                                                                                                                          |
| <b>HARDWARE FEATURES</b> |                                                                                                                                                                                                                                                  |
| <b>Interface</b>         | <ul style="list-style-type: none"> <li>• 8x 10/100/1000 Mbps PoE+ RJ45 Ports (802.3af/at-compliant PoE+)</li> <li>• 1x 10/100/1000 Mbps RJ45 Port</li> <li>• 1x Gigabit SFP/RJ45 Combo Port</li> <li>• Auto-Negotiation/Auto MDI/MDIX</li> </ul> |
| <b>Fan</b>               | Fanless                                                                                                                                                                                                                                          |

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Physical Security Lock</b>   | Yes                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Power Supply</b>             | AC/DC Adapter (Input: 100-240V AC; Output: 53.5V DC/1.31A)                                                                                                                                                                                                                                                                                                                                                      |
| <b>PoE Ports (RJ45)</b>         | <ul style="list-style-type: none"> <li>• Standard: 802.3af/at PoE+ compliant</li> <li>• PoE Ports: 8 ports</li> <li>• PoE Budget: 63W available for all PoE+ ports, 30W max per port</li> <li>• Fast PoE &amp; Perpetual PoE</li> <li>• PoE Auto Recovery</li> </ul>                                                                                                                                            |
| <b>Dimensions ( W x D x H )</b> | 8.2×4.9×1.0 in (209×126×26 mm)                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Surge Protection</b>         | ±6 kV                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Mounting</b>                 | <ul style="list-style-type: none"> <li>• Desktop</li> <li>• Wall Mount</li> </ul>                                                                                                                                                                                                                                                                                                                               |
| <b>Max. Power Consumption</b>   | 74.1 W (220 V/50 Hz @ 25 °C) (with 63 W PD connected)<br>76.6 W (110 V/60 Hz @ 25 °C) (with 63 W PD connected)                                                                                                                                                                                                                                                                                                  |
| <b>Max. Heat Dissipation</b>    | 252.01 BTU/hr (220 V/50 Hz @ 25 °C) (with 63 W PD connected)<br>260.41 BTU/hr (110 V/60 Hz @ 25 °C) (with 63 W PD connected)                                                                                                                                                                                                                                                                                    |
| <b>Packet Buffer Memory</b>     | 4 Mbit                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Switching Capacity</b>       | 20 Gbps                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Packet Forwarding Rate</b>   | 14.88 Mpps                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>MAC Address Table</b>        | 8K                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Jumbo Frame</b>              | 15 KB                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Transmission Method</b>      | Store and Forward                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>SOFTWARE FEATURES</b>        |                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Quality of Service</b>       | <ul style="list-style-type: none"> <li>• Port-based/802.1p/DSCP QoS</li> <li>• 8 Priority Queues</li> <li>• Priority Schedule Mode</li> <li>- WRR (Weighted Round Robin)</li> <li>• Queue Weight Config</li> <li>• Bandwidth Control</li> <li>- Port-Based Rating Limit</li> <li>• Storm Control</li> <li>- Multiple Control Modes (kbps/pps)</li> <li>- Broadcast/Multicast/Unknown-Unicast Control</li> </ul> |

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>L2 Features</b>     | <ul style="list-style-type: none"> <li>• Link Aggregation               <ul style="list-style-type: none"> <li>- Static Link Aggregation</li> <li>- Up to 4 aggregation groups and up to 6 ports per group</li> </ul> </li> <li>• Port Isolation</li> <li>• Loopback Detection</li> <li>• Flow Control               <ul style="list-style-type: none"> <li>- 802.3x Flow Control</li> </ul> </li> <li>• Mirroring               <ul style="list-style-type: none"> <li>- Port Mirroring</li> <li>- One-to-One</li> <li>- Many-to-One</li> <li>- Ingress/Egress/Both</li> </ul> </li> <li>• Port Statistics               <ul style="list-style-type: none"> <li>- Port Mirror Status</li> <li>- Traffic Statistics</li> </ul> </li> <li>• 802.1ab LLDP</li> <li>• IEEE 802.3az EEE</li> </ul> |
| <b>L2 Multicast</b>    | <ul style="list-style-type: none"> <li>• IGMP Snooping               <ul style="list-style-type: none"> <li>- IGMP v1/v2/v3 Snooping</li> <li>- Fast Leave / Report Suppression</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>VLAN</b>            | <ul style="list-style-type: none"> <li>• 802.1Q Tag VLAN               <ul style="list-style-type: none"> <li>- Max 32 VLAN Groups</li> <li>- 4K VID</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>OTHERS</b>          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Certification</b>   | CE, FCC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Package Content</b> | <ul style="list-style-type: none"> <li>• ES210GP</li> <li>• Power Adapter</li> <li>• Power Cord</li> <li>• Mounting Feet</li> <li>• Installation Guide</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Environment</b>     | <ul style="list-style-type: none"> <li>• Operating Temperature: -5-40C (23-104F)</li> <li>• Storage Temperature: -40-70C (-40-158F)</li> <li>• Operating Humidity: 10-90% RH non-condensing</li> <li>• Storage Humidity: 5-90% RH non-condensing</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

**URL :** <https://www.citraweb.com/produk/1606/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**