

OgmaConnect OC2000U (RoS Level 6)




Kode : OC2000U-L6
Kategori : Discontinued
Harga : Rp 16.995.000,00

This Ogma Connect OC2000U Appliance is presented in a 19" rack-mount form factor. One can deploy one of these appliances inside 1 U of Rack space. The Ogma Connect is powered by a state of the art Intel Multi Core Processor and the Intel 945G Chip-set.

Spesifikasi

- **CPU** : Multi Core x86-64 64 Bit, Intel Core2Duo Processor
- **Memory** : 2 x 667MHz DDR2 Slots, 2 x 1024MB (2GB RAM) installed on the base Model
- **Boot loader** : Phoenix BIOS
- **Data storage** : 2x SATA, 2X IDE, 1x CF Slots with True IDE IBM MicroDrive Support
- **Ethernet** : 7 x 10/100/1000 Mbit/s Intel Pro 1000 Gigabit Ethernet ports supporting Auto-MDI/X through PCI-E single Lanes
- **PCI Slots** : 1x Mini PCI Slot, 1x Mini PCI 32 Bit Slot
- **Serial port** : 2x DB9 RS232C asynchronous serial ports
- **LEDs / LCDs** : 1x back lit 2character x16 character LCD Display, Power and HDD LED
- **Speaker** : Mini PC - Speaker
- **Power** : IEC C13 Power Cord, input power: 100VAC-250VAC 50Hz- 60Hz (International PSU)
- **Fan** : 3x Redundant CPU/Power Supply /Chassis Fans,
- **Dimensions** : 31cm x 45 cm x 4.4 cm
- **Temperature** : Operational: 0Â°C to 45Â°C
- **Humidity** : Operational: up to 95% relative humidity (non-condensing)
- **Power Supply** : 270W ATX PSU
- **Operating System** : MikroTik Router OS

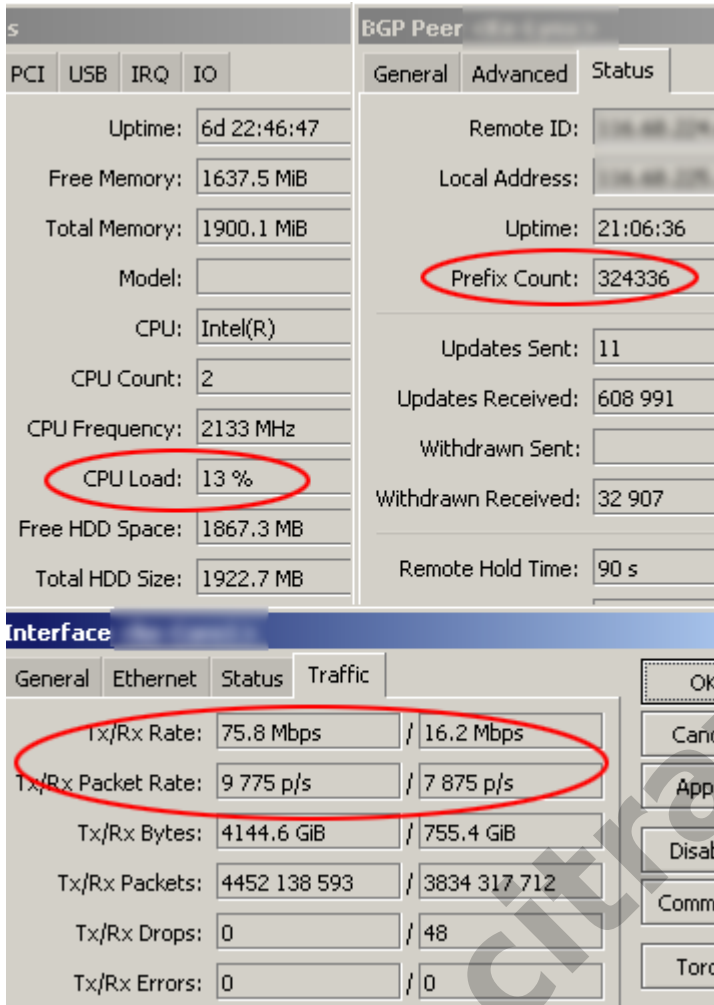

The screenshot displays system and BGP Peer information. The CPU Load is 13% and the BGP Peer Prefix Count is 324336. The interface traffic shows Tx/Rx Rate of 75.8 Mbps / 16.2 Mbps and Tx/Rx Packet Rate of 9775 p/s / 7875 p/s.

System		BGP Peer	
Uptime:	6d 22:46:47	Remote ID:	
Free Memory:	1637.5 MiB	Local Address:	
Total Memory:	1900.1 MiB	Uptime:	21:06:36
Model:		Prefix Count:	324336
CPU:	Intel(R)	Updates Sent:	11
CPU Count:	2	Updates Received:	608 991
CPU Frequency:	2133 MHz	Withdrawn Sent:	
CPU Load:	13 %	Withdrawn Received:	32 907
Free HDD Space:	1867.3 MB	Remote Hold Time:	90 s
Total HDD Size:	1922.7 MB		

Interface	
Tx/Rx Rate:	75.8 Mbps / 16.2 Mbps
Tx/Rx Packet Rate:	9775 p/s / 7875 p/s
Tx/Rx Bytes:	4144.6 GiB / 755.4 GiB
Tx/Rx Packets:	4452 138 593 / 3834 317 712
Tx/Rx Drops:	0 / 48
Tx/Rx Errors:	0 / 0

Screen capture OC2000 di kondisi real, mampu melewati lebih dari 9 ribu pps dan menerima full route BGP (300K prefix) dengan CPU load 15%

Test Type | **Aggregate Result**

TCP Routed 2.288 Mb/sec

Contract On 188.406 Packet/sec

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/226/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com