

## MikroBits Ainos 2071 (RoS Level 4)

**Kode** : MBITS2071-L4  
**Brand** : Discontinued  
**Jenis** : Discontinued  
**Harga** : Rp 10.135.000,00



**--Discontinued--** Router ini berbasis processor Intel Multi Core dengan 1U rackmount. Memiliki 7 buah port gigabit yang terkoneksi langsung ke mainboard, memberikan kecepatan tinggi pada tiap portnya. Sudah termasuk MikroTik RouterOS level 4.



### Spesifikasi

- **CPU** : Multi Core x86-64 64 Bit, Intel Core2Duo E7500 2.93 GHz Processor
- **Memory** : 2 x 667MHz DDR2 Slots, 2 x 1024MB Industrial Grade RAM (2GB RAM) installed on the base Model
- **Boot loader** : Phoenix BIOS
- **Data storage** : 2x SATA, 1x CF Slots with True IDE IBM MicroDrive Support
- **Compact Flash** : 1 GB Industrial Grade Compact Flash for RouterOS
- **HDD** : 250GB SATA 2.5" HDD
- **Ethernet** : 7 x 10/100/1000 Mbit/s Intel Pro 1000 Gigabit Ethernet ports supporting Auto-MDI/X through PCI-E single Lanes
- **PCI Slots** : 1x PCI Slot, 1x Mini PCI 32 Bit Slot
- **Serial port** : 2x DB9 RS232C asynchronous serial ports
- **LEDs / LCDs** : 1x back lit 2character x16 character LCD Display, Power and HDD LED
- **Speaker** : Mini PC - Speaker
- **Power** : IEC C13 Power Cord, input power: 100VAC-250VAC 50Hz- 60Hz (International PSU)
- **Fan** : 3x Redundant CPU/Power Supply /Chassis Fans,
- **Dimensions** : 31cm x 45 cm x 4.4 cm
- **Temperature** : Operational: 0Â°C to 45Â°C
- **Humidity** : Operational: up to 95% relative humidity (non-condensing)
- **Power Supply** : 270W ATX PSU
- **Operating System** : MikroTik Router OS




admin@192.168.88.3 (MikroTik) – WinBox v5.0rc11 on x86 (x86)

Uptime: 05:07:55 Memory: 1876.5 MiB CPU: 54%

Interface List

Interface	Ethernet	EoIP Tunnel	IP Tunnel	GRE Tunnel	VLAN	VRRP	Bonding
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Name	Type	L2 MTU	Tx	Rx	Tx Pac...	Rx Pac...	
R ether1	Ethernet		671.9 M...	672.0 M...	55 333	55 340	
R ether2	Ethernet		672.0 M...	671.9 M...	55 340	55 334	
R ether3	Ethernet		672.0 M...	672.1 M...	55 347	55 353	
R ether4	Ethernet		672.0 M...	672.0 M...	55 346	55 339	
R ether5	Ethernet		671.9 M...	672.0 M...	55 337	55 344	
R ether6	Ethernet		672.0 M...	671.9 M...	55 343	55 337	
R ether7	Ethernet		40.9 kbps	4.8 kbps	5	6	

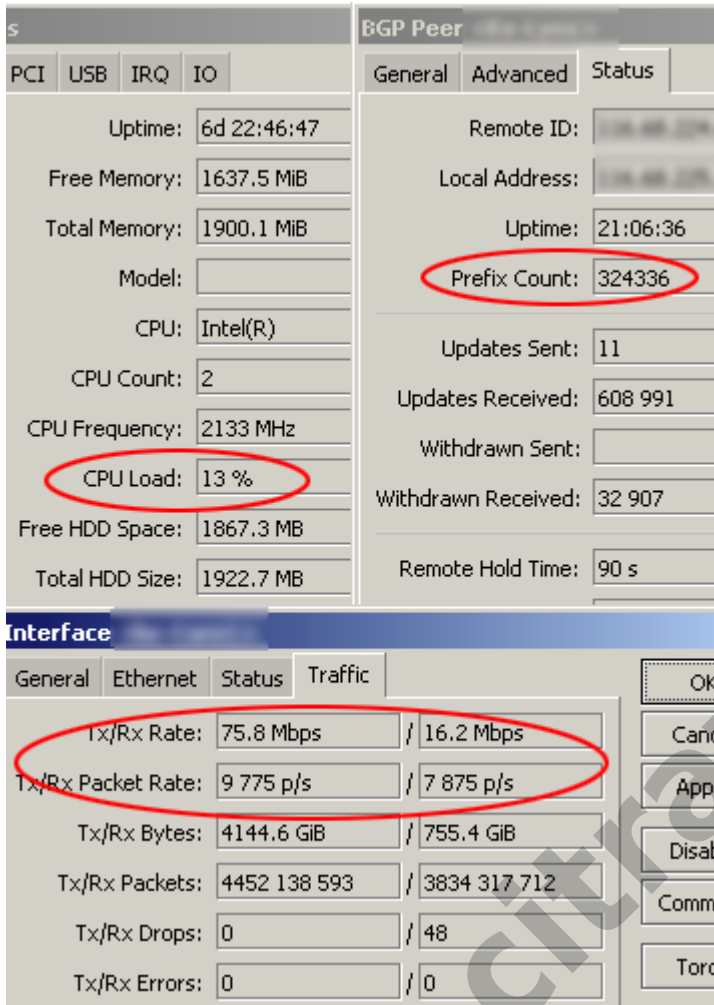

**System**

Uptime:	6d 22:46:47
Free Memory:	1637.5 MiB
Total Memory:	1900.1 MiB
Model:	
CPU:	Intel(R)
CPU Count:	2
CPU Frequency:	2133 MHz
CPU Load:	13 %
Free HDD Space:	1867.3 MB
Total HDD Size:	1922.7 MB

**BGP Peer**

Remote ID:	
Local Address:	
Uptime:	21:06:36
Prefix Count:	324336
Updates Sent:	11
Updates Received:	608 991
Withdrawn Sent:	
Withdrawn Received:	32 907
Remote Hold Time:	90 s


**Interface**

Tx/Rx Rate:	75.8 Mbps	/	16.2 Mbps
Tx/Rx Packet Rate:	9 775 p/s	/	7 875 p/s
Tx/Rx Bytes:	4144.6 GiB	/	755.4 GiB
Tx/Rx Packets:	4452 138 593	/	3834 317 712
Tx/Rx Drops:	0	/	48
Tx/Rx Errors:	0	/	0

Screen capture pada kondisi real, mampu melewati lebih dari 9 ribu pps dan menerima full route BGP (300K prefix) dengan CPU load 15%

Test type	Aggregate Result
TCP Routed	3.9 Gb/sec
Contract On	1.000K Packet/sec

**Bypass Function** - Aktif secara otomatis jika terjadi fail terhadap system (OS fail / Power fail).

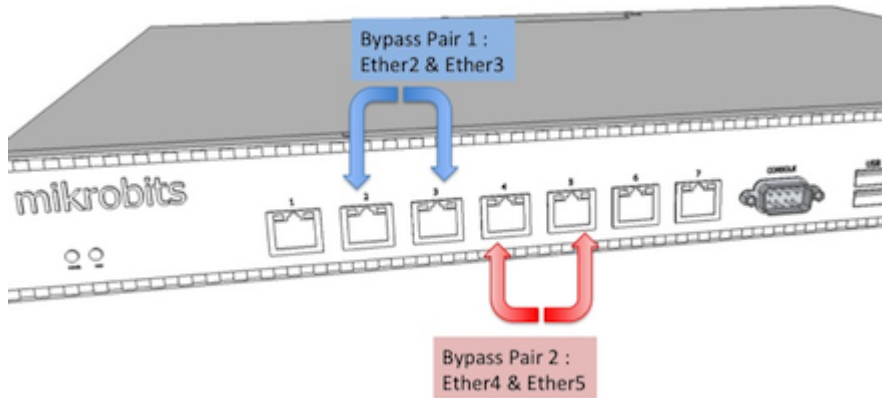

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

**URL :** <https://www.citraweb.com/produk/248/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**

www.citraweb.com