

MikroBits Ainos 2071 (RoS Level 5)



Kode : MBITS2071-L5

Kategori : Discontinued

Harga : Rp 10.415.000,00

--Discontinued-- Router ini berbasis processor Intel Multi Core dengan 1U rackmount. Memiliki 7 buah port gigabit yang terkoneksi langsung ke mainboard, memberikan kecepatan tinggi pada tiap portnya. Sudah termasuk MikroTik RouterOS level 5.



Spesifikasi

- **CPU** : Multi Core x86-64 64 Bit, Intel Core2Duo E7500 2.93 GHz Processor
- **Memory** : 2 x 667MHz DDR2 Slots, 2 x 1024MB Industrial Grade RAM (2GB RAM) installed on the base Model
- **Boot loader** : Phoenix BIOS
- **Data storage** : 2x SATA, 1x CF Slots with True IDE IBM MicroDrive Support
- **Compact Flash** : 1 GB Industrial Grade Compact Flash for RouterOS
- **HDD** : 250GB SATA 2.5" HDD
- **Ethernet** : 7 x 10/100/1000 Mbit/s Intel Pro 1000 Gigabit Ethernet ports supporting Auto-MDI/X through PCI-E single Lanes
- **PCI Slots** : 1x PCI Slot, 1x Mini PCI 32 Bit Slot
- **Serial port** : 2x DB9 RS232C asynchronous serial ports
- **LEDs / LCDs** : 1x back lit 2character x16 character LCD Display, Power and HDD LED
- **Speaker** : Mini PC - Speaker
- **Power** : IEC C13 Power Cord, input power: 100VAC-250VAC 50Hz- 60Hz (International PSU)
- **Fan** : 3x Redundant CPU/Power Supply /Chassis Fans,
- **Dimensions** : 31cm x 45 cm x 4.4 cm
- **Temperature** : Operational: 0Â°C to 45Â°C
- **Humidity** : Operational: up to 95% relative humidity (non-condensing)
- **Power Supply** : 270W ATX PSU
- **Operating System** : MikroTik Router OS




admin@192.168.88.3 (MikroTik) – WinBox v5.0rc11 on x86 (x86)

Uptime: 05:07:55 Memory: 1876.5 MiB CPU: 54%

Interface List

Interface	Ethernet	EoIP Tunnel	IP Tunnel	GRE Tunnel	VLAN	VRRP	Bonding
Name	Type	L2 MTU	Tx	Rx	Tx Pac...	Rx Pac...	
R ether1	Ethernet		671.9 M...	672.0 M...	55 333	55 340	
R ether2	Ethernet		672.0 M...	671.9 M...	55 340	55 334	
R ether3	Ethernet		672.0 M...	672.1 M...	55 347	55 353	
R ether4	Ethernet		672.0 M...	672.0 M...	55 346	55 339	
R ether5	Ethernet		671.9 M...	672.0 M...	55 337	55 344	
R ether6	Ethernet		672.0 M...	671.9 M...	55 343	55 337	
R ether7	Ethernet		40.9 kbps	4.8 kbps	5	6	

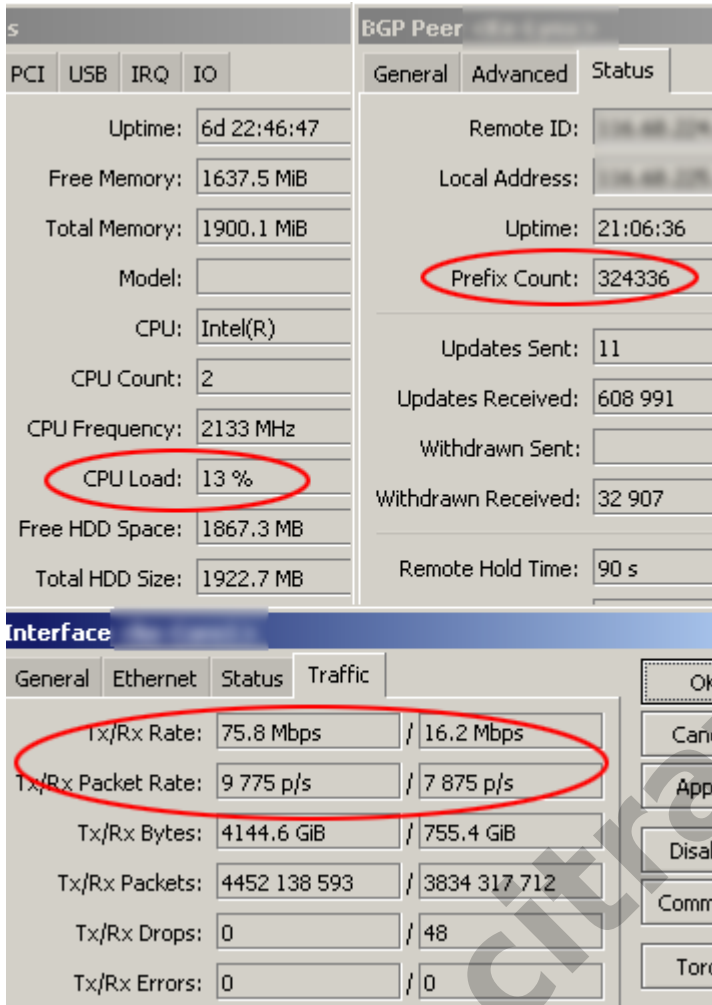

The screenshot displays system statistics and BGP Peer information. In the system statistics, 'CPU Load' is highlighted at 13%. In the BGP Peer section, 'Prefix Count' is highlighted at 324336. Below, the 'Interface' section shows traffic statistics for an Ethernet interface, with 'Tx/Rx Rate' highlighted at 75.8 Mbps / 16.2 Mbps.

System Statistics	BGP Peer
Uptime: 6d 22:46:47	Remote ID: [redacted]
Free Memory: 1637.5 MiB	Local Address: [redacted]
Total Memory: 1900.1 MiB	Uptime: 21:06:36
Model: [redacted]	Prefix Count: 324336
CPU: Intel(R)	Updates Sent: 11
CPU Count: 2	Updates Received: 608 991
CPU Frequency: 2133 MHz	Withdrawn Sent: [redacted]
CPU Load: 13 %	Withdrawn Received: 32 907
Free HDD Space: 1867.3 MB	Remote Hold Time: 90 s
Total HDD Size: 1922.7 MB	

Interface Traffic
Tx/Rx Rate: 75.8 Mbps / 16.2 Mbps
Tx/Rx Packet Rate: 9 775 p/s / 7 875 p/s
Tx/Rx Bytes: 4144.6 GiB / 755.4 GiB
Tx/Rx Packets: 4452 138 593 / 3834 317 712
Tx/Rx Drops: 0 / 48
Tx/Rx Errors: 0 / 0


Screen capture pada kondisi real, mampu melewati lebih dari 9 ribu pps dan menerima full route BGP (300K prefix) dengan CPU load 15%

Test Type | **Aggregate Result**

TCP Routed 3.9 Gb/sec

Contrack On 1.000K Packet/sec

Bypass Function - Aktif secara otomatis jika terjadi fail terhadap system (OS fail / Power fail).

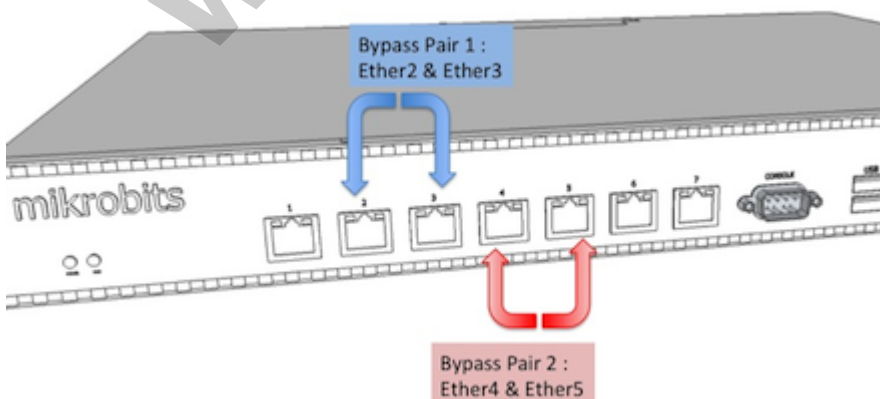

** Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

URL : <https://www.citraweb.com/produk/249/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com

www.citraweb.com