

Line Interactive UPS, 1500VA/900W



Kode : Plus5L-U1500G

Kategori : APlus UPS System

Harga : Rp 1.195.000,00

Plus5L-U1500G adalah produk dari APlus UPS System dengan rating 1500VA/900Watt dan memiliki desain "Easy Battery Replacement". Desain ini memungkinkan pengguna untuk mudah melakukan maintenance atau mengganti battery jika sudah lemah.

***Penjualan produk ini tidak termasuk battery**

Features :

- Controlled by a technologically advanced microprocessor guaranteeing high reliability
- Equipped with 2-steps boost & 1-step buck AVR to stabilize output voltage
- USB port and monitor software is designed to manage UPS status via PC (Optional)
- Built-in DC start function enables UPS to be started without AC power supplied
- Constant current, constant voltage battery charger (CCCV Battery Charger)
- UPS will charge itself even though power switch is off (Off mode charging)
- UPS will shut down upon battery low ; UPS will restart automatically upon AC recovery (Auto-restart)
- Over / under voltage protection (UPS will go to battery mode)
- Easy replacement battery design
- Lightning / surge protection 175 joules

Battery Type :

- VRLA 12V/9AH or VRLA 12V/7.2AH
- 2 pcs
- **Battery dimension 151 x 65 x 100 mm**


Backup Time (estimated) :

| LOAD | 9AH Battery | 7.2AH Battery |
|----------|-------------|---------------|
| 900 Watt | 10 Minutes | 8 Minutes |
| 700 Watt | 12 Minutes | 10 Minutes |

| | | |
|----------|------------|------------|
| 500 Watt | 18 Minutes | 14 Minutes |
|----------|------------|------------|

Easy Battery Replacement and Installation :

Intelligent Battery Door Design:

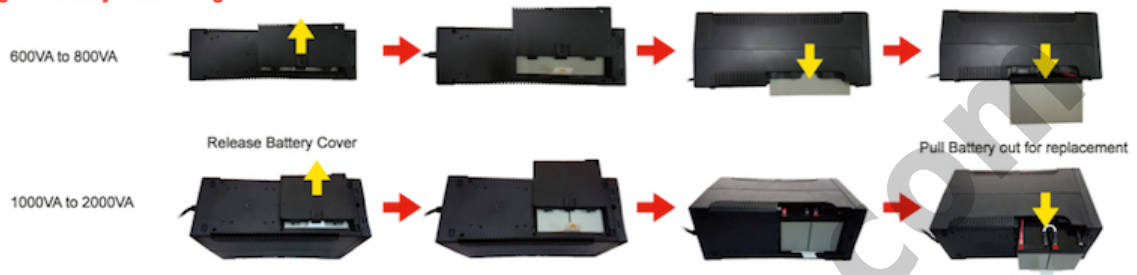

Manual :

[UPS-Aplus-Plus5L.pdf](#)

Specification :

| | |
|--|--|
| INPUT | |
| Voltage | 110/115/120Vac or 220V/230/240Vac |
| Voltage Range | -30% +25% |
| Frequency | 50Hz or 60Hz (Auto-Sensing) |
| OUTPUT | |
| Voltage Regulation | AC Mode / Battery normal : 110/115/120Vac or 220/230/240Vac +/- 10% |
| Frequency | AC mode: 47-53Hz for 50Hz or 57-63Hz for 60Hz; Battery mode: 50Hz or 60Hz +/- 1Hz |
| Waveform | Simulated Sinewave |
| Transfer Time | < 6ms(Typical) |
| Outlet: IEC-320 C13*2pcs + Schuko*4pcs | 6pcs with backup/AVR/Surge protected |
| BATTERY | |
| Voltage | 24VDC |
| Type | 12V/9AH*2pcs |
| Recharge Time | 5 hours to 90% after complete discharge |
| Safety Protection | Over Charge & Over Discharge Protection |
| Advance Battery Management | Yes |
| DISPLAY | |
| LED Status Indicators | Input voltage, Output voltage, Load level, Battery level, Fault, Battery fail, Overload, AC normal |
| AUDIBLE ALARM | |

| | |
|------------------------|--|
| Battery Mode | Two short tones every 8 seconds |
| Low Battery | Four short tones every seconds |
| Overload | Beeping continuously |
| Fault | Beeping continuously |
| MANAGEMENT | |
| USB Communication Port | Included, Software support Windows 95/98/NT/2000/ME/XP/2003/Vista/7/8/10 |
| ENVIRONMENT | |
| Operating Temperature | 0° C - 40° C (32° F ~ 104° F) |
| Humidity | 0-95% (Non-condensing) |
| Acoustic Noise | <40 db at 1M |
| PHYSICAL | |
| Dimension (W*D*H) | 343*135*208mm |

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/810/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com