CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

On Line UPS PlusIII-1KLRB



Kode : PlusIII-1KLRB
Brand : Discontinued
Jenis : Discontinued
Harga : Rp 3.820.000,00

PlusIII-1KLRB adalah produk dari APlus UPS System dengan rating 1000VA/900Watt yang memiliki desain ganda (tower / rackmount) dan juga "Easy Battery Replacement".
Dilengkapi dengan external PDU dan sekaligus MBS (Maintenance Bypass Switch) sehingga memungkinkan pengguna untuk mudah melakukan maintenance atau mengganti battery jika sudah lemah.

***Penjualan produk ini tidak termasuk battery**

www.citraweb.com

Features :

- High performance true double-conversion On Line UPS 1000VA
- Individual power distribution unit (PDU) maintenance bypass switch
- Intelligent Slot (SNMP card not included) + USB multiple communications
- External battery bank to extend back-up time (Optional)
- Microprocessor control guarantees high reliability
- Low heat dissipation in long time operation
- Emergency power-off function (EPO)
- Automatic self-testing function
- High efficiency mode (ECO mode)
- Output voltage regulation < 2%
- Power management software
- Output power factor 0.9
- Wide input range
- Fan speed control
- DC start


Battery Type :

- VRLA 12V/9AH or VRLA 12V/7.2AH
- 3 pcs
- **Battery dimension 151 x 65 x 100 mm**

Backup Time (estimated) :

LOAD	9AH Battery	7.2AH Battery
900 Watt	15 Minutes	12 Minutes
700 Watt	19 Minutes	15 Minutes
500 Watt	27 Minutes	21 Minutes

Easy Maintenace and Installation :

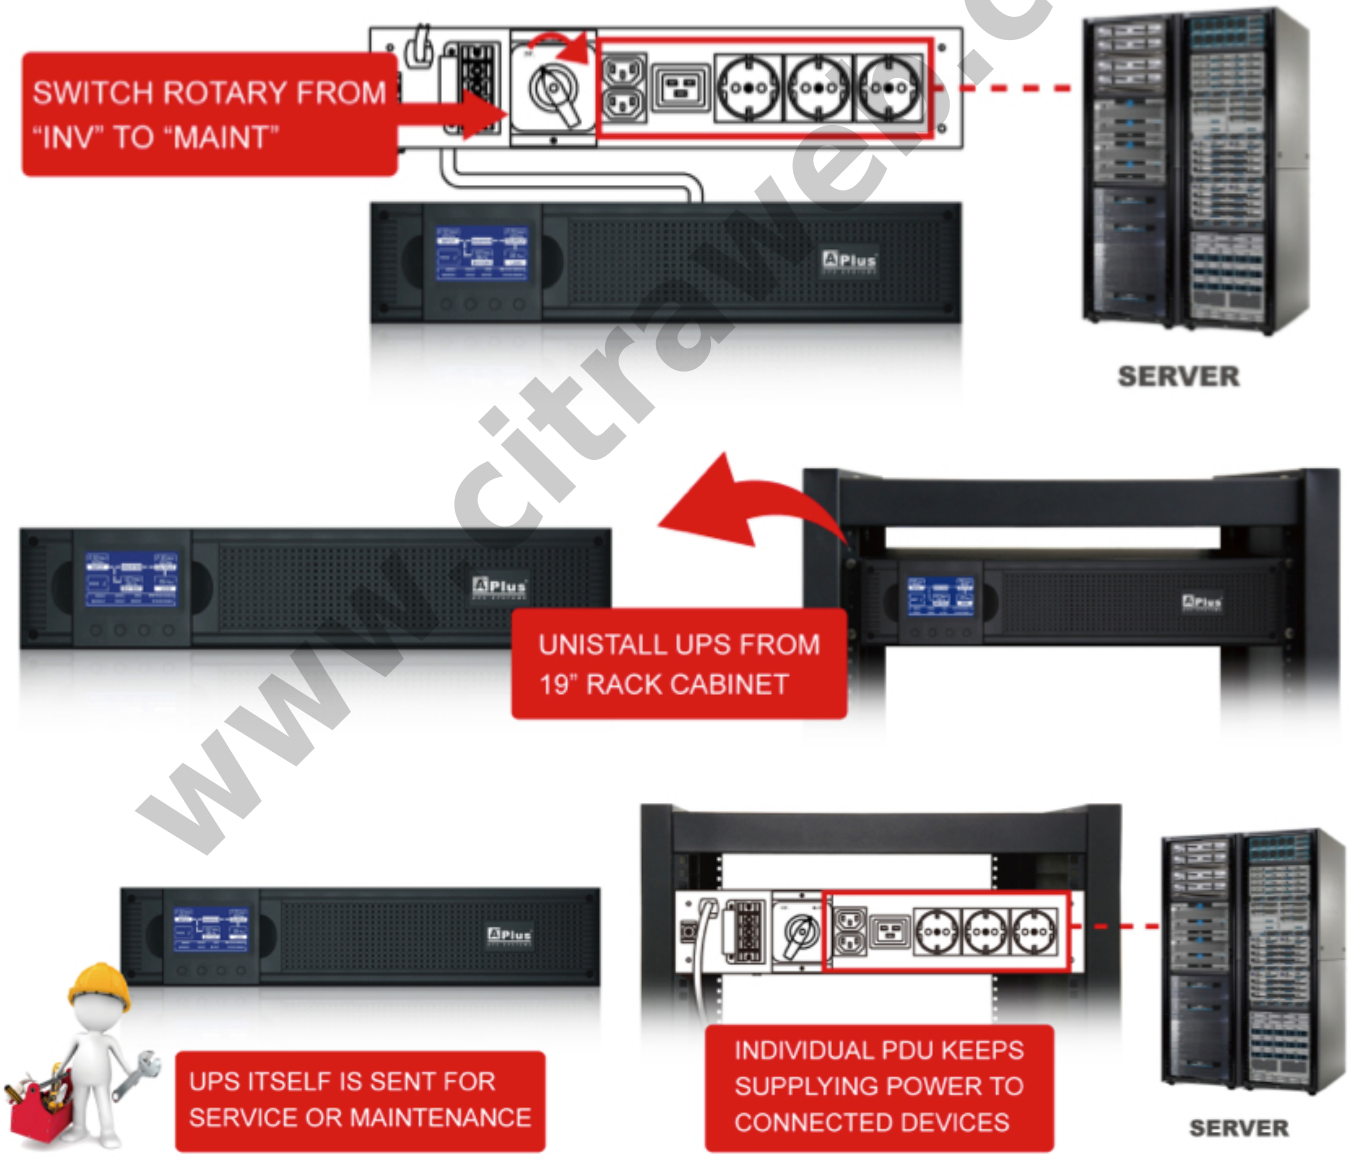

www.citraweb.com

Manual :

UPS-Aplus-PlusIII-HV.pdf

Battery Installation Guide :

Applus_PlusIII-1KLRB_battery_Installation.pdf

Add-on Accessories :

Universal Rackmount L Rail

Specification :

INPUT	
Voltage	1 Phase 2 Wires with Ground 220/230/240Vac
Voltage Range	110-300Vac
Frequency	50Hz or 60Hz (Auto-Sensing)
THDi	< 5% at full Load
OUTPUT	
Voltage	220/230/240Vac
Voltage Range	+/- 2%
Frequency (Battery Mode)	50Hz or 60Hz +/- 0.2Hz
Waveform	Pure Sinewave
THD	< 3%(linear load), < 5%(non-linear load)
Crest Ratio	3:1
EFFICIENCY	
To AC Mode	> 88%
To Battery Mode	> 85%
To ECO Mode	> 93%
BATTERY	
Voltage	36VDC
Type	12V/7AH*3pcs

www.citraweb.com

CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

Recharge Time	5 hours to 90%
TRANSFER TIME	
Line Mode to Battery Mode	0ms
Inverter to Bypass, ECO Mode	< 4ms
ECO Mode to Inverter	< 10ms
DISPLAY	
LCD Display	Input, Output, Load, Battery, Mode/Fault/Warning code, Inverter operating, Bypass operating, Output voltage and frequency and Bypass disable / enable selection information
AUDIBLE ALARM	
Battery Mode	Beeps Every 4 Seconds
Low Battery	Sounding Every Second
Overload	Sounding Twice Every Second
Fault	Beeping continuosly
COMMUNICATIONS	
Interface (Port)	USB Port
Intelligent Slot	Slot for SNMP or AS400 card (Optional)
EPO	Emergency Power Off
ENVIRONMENT	
Operating Temperature	0° C - 45° C
Humidity	20-90% (Non-condensing)
Acoustic Noise	<50db at 1M
PHYSICAL	
Rack Height	2U
Dimension (W*D*H)	480*440*90mm

www.citraweb.com

** Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

URL : https://www.citraweb.com/produk/811/

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com

www.citraweb.com