

## Solar Home Inverter INV-S2200PV



**Kode** : INV-S2200PV

**Kategori** : MARUSON

**Harga** : Rp 2.100.000,00

INV-S2200PV adalah produk solar home inverter yang bisa menjadi solusi untuk kebutuhan energi alternative di rumah Anda. Produk Inverter ini memiliki kapasitas 2200VA/1320Watt yang juga dilengkapi dengan solar charger 40A bertipe PWM.


\*tidak termasuk battery

**\*\*Gunakan battery yang dirancang untuk SHS (Solar Home System) / Deep-cycle VRLA**

Penawaran Harga Spesial

 **08112039555**




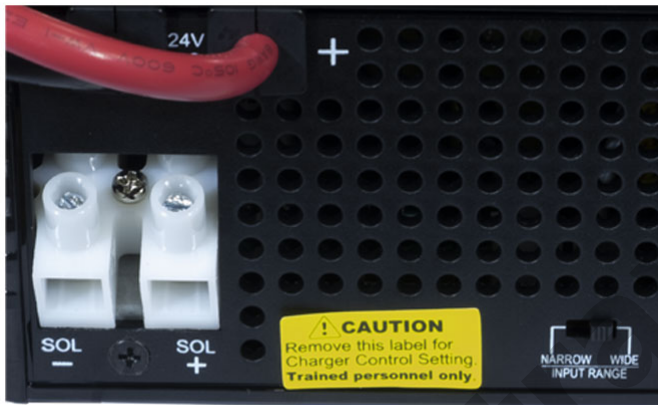



**Features :**

- 2.2KVA simulated sine wave inverter
- Selectable input voltage range for home appliances and personal computers
- Built-in internal 40A PWM solar charge controller
- Desktop and wall-mountable design
- Generators & computer-related devices compatible
- Configurable AC / Solar input priority
- Overload and short circuit protection
- Cold start function

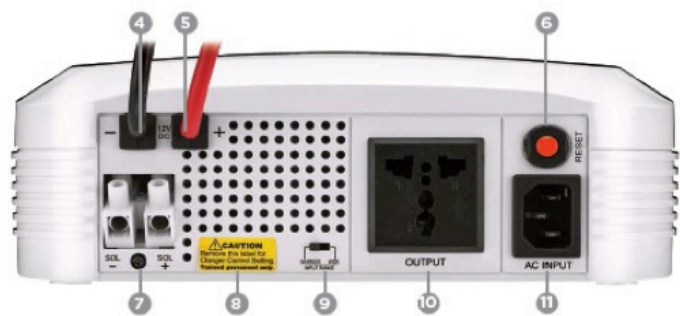

- |                               |                                 |
|-------------------------------|---------------------------------|
| 1. Multifunction LCD Readout  | 7. PV Input Terminals           |
| 2. Power On/Off Switch        | 8. Charger Control              |
| 3. LCD Readout Toggle Button  | 9. Input Voltage Range Selector |
| 4. DC Input Cable (Black "-") | 10. AC outlet                   |
| 5. DC Input Cable (Red "+")   | 11. AC Inlet                    |
| 6. Input Circuit Breaker      |                                 |

**Battery Recommendation :**

- Solar Home System Battery
- Deep Cycle VRLA Battery
- VRLA Gel / AGM Battery

**Specification :**

<b>Model</b>	<b>INV-S2200PV</b>
Capacity	2200VA / 1320 Watt
<b>INPUT</b>	
Voltage	220 / 230 / 240 VAC
Voltage Range	170 ~ 280 VAC (narrow mode)
	90 ~ 280 VAC (wide mode)
Freq	50 / 60 Hz (auto sensing)
<b>OUTPUT</b>	
Voltage	220 / 230 / 240 VAC
Transfer Time	15 ~ 20ms
Waveform	Simulated sine wave
<b>BATTERY</b>	
	(Not Included)
Battery Voltage	24 VDC
Charging Voltage	27.4 VDC
Max. AC Charge Current	10A
<b>SOLAR CHARGER</b>	
Max PV Input Power	1000 W
Max PV Input Voltage	55 VDC
Max Solar Charging Current	40 A
<b>PROTECTION</b>	
Full Protection	Overload and short circuit protection
<b>INDICATOR</b>	
Display	LCD
Alarm	Battery mode, Low battery, Overload, Fault
<b>PHYSICAL</b>	
Dimension (DxWxH) mm	265 x 260 x 90
Net Weight kg	2.32

**Manual :** [INV-S2200PV-Manual.pdf](#)

*\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

**URL :** <https://www.citraweb.com/produk/757/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**

[www.citraweb.com](http://www.citraweb.com)