


RFelements UltraDish TP 380 5Ghz 24dbi

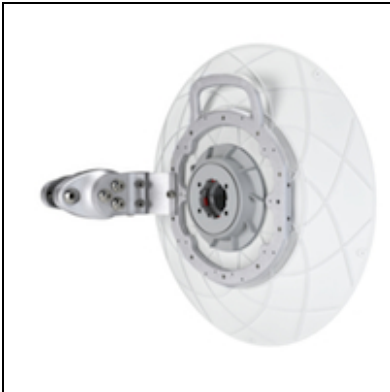

Kode : ULD-TP-380
Kategori : RF Elements
Harga : Rp 1.740.000,00

UltraDish TP Antennas are high-gain directional parabolic antennas with a lossless TwistPort connector. The antennas are highly directional and have suppressed sidelobes for ultimate performance.

Paket ini hanya terdiri dari unit antenna saja belum termasuk wireless Access Point.


UltraDish™ TP 380




UltraDish™ TP 380's are designed for CPE or PtP connections. The antenna reflector is made of die-cast aluminum to ensure a very uniform shape. Our virtually lossless TwistPort™ connector guarantees easy radio deployment and maintenance.



Antenna installation is extremely easy and ensures rapid deployment for large scale projects. Our innovative antenna mount fits a wide range of pole diameters and can be easily swapped for right or left side mounts. A single HEX tool is all you need to perform your installation.

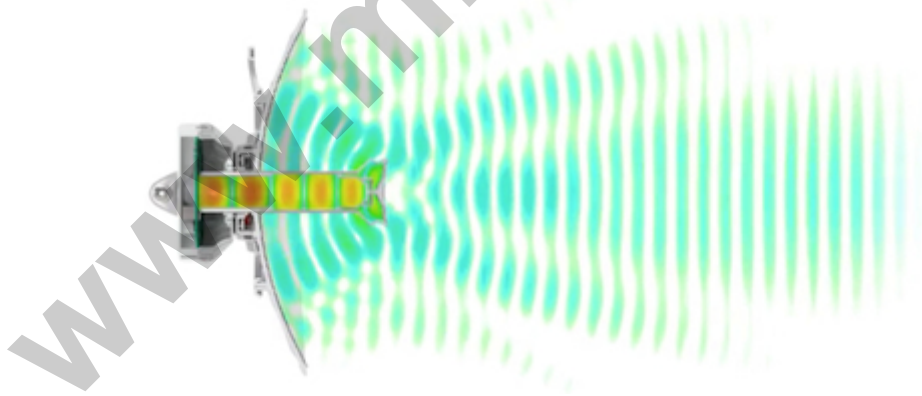

Suppressed sidelobe radiation reduces interferences and enables installation in areas with high noise levels. The gain of UltraDish TP antennas is achieved by focusing the signal delivered via the TwistPort waveguide connector. UltraDish TP 380 provides a 24dBi gain and an 8° (-3dB) beamwidth.

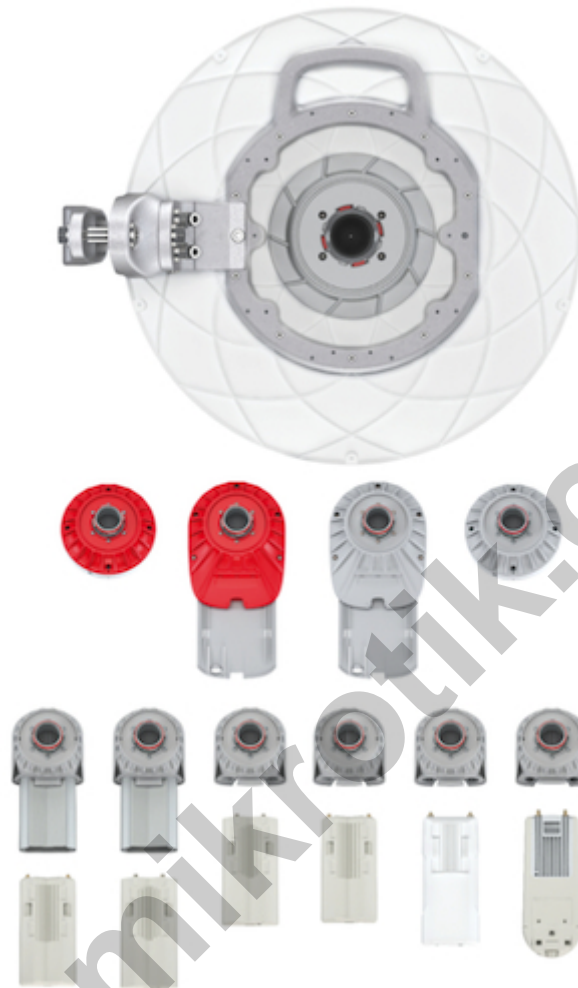

COMPATIBLE WIRELESS PLATFORMS :

any TwistPort™ Adaptor with TwistPort™ connector
any SIMPER™ Radio with TwistPort™ connector


PERFORMANCE :

Gain : 24 dBi
Azimuth Beam Width -6 dB : H 12° / V 12°
Elevation Beam Width -6 dB : H 12° / V 12°
Azimuth Beam Width -3 dB : H 8° / V 8°
Elevation Beam Width -3 dB : H 8° / V 8°
Front-to-Back Ratio (Min) : 24 dB

SPESIFIKASI TEKNIS :

Antenna Connection : TwistPort™ - Quick Locking Waveguide Port
Antenna Type : Parabolic Dish
Frequency Range : 5100 - 6000 MHz
Environmental : IP65
Pole Mounting Diameter : 15-86 mm
Temperature : -40 to +60 °C (-40°F to +140°F)
Wind Survival : 160 Km/h
Weight : 2.9 Kg / 6.4 lbs – single unit incl. package

Single Unit Retail Box : 46.5 x 43 x 12 cm

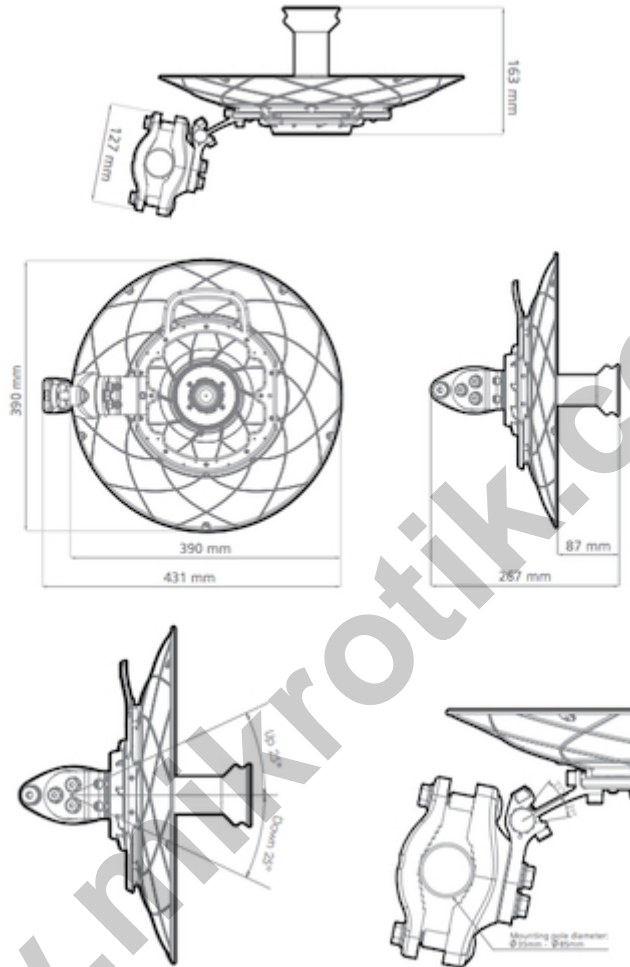

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : http://www.mikrotik.co.id/produk_lihat.php?id=574

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email info@mikrotik.co.id